

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 March 2005 (10.03.2005) ✓

PCT

(10) International Publication Number  
WO 2005/022607 A1 ✓

(51) International Patent Classification<sup>7</sup>: H01L 21/00

Akira. ✓ HAMASAKI, Kurayasu. ✓ TANI, Noriyuki. ✓  
MINAMITANI, Shozo. ✓ MAKINO, Yoichi. ✓

(21) International Application Number:

PCT/JP2004/012600 ✓

(74) Agents: KAWAMIYA, Osamu ✓ et al.; Aoyama & Partners,  
IMP Building 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi,  
Osaka 5400001 (JP).

(22) International Filing Date: 25 August 2004 (25.08.2004) ✓

(25) Filing Language:

English ✓

(26) Publication Language:

English ✓

(30) Priority Data:

2003-302782 ✓ 27 August 2003 (27.08.2003) ✓ JP ✓

(71) Applicant (for all designated States except US): MAT-  
SUSHITA ELECTRIC INDUSTRIAL CO., LTD. ✓  
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka  
5718501 (JP). ✓

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, ✓  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,  
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(72) Inventors; and

(75) Inventors/Applicants (for US only): KABESHITA,

[Continued on next page]

(54) Title: COMPONENT MOUNTING APPARATUS AND COMPONENT MOUNTING METHOD

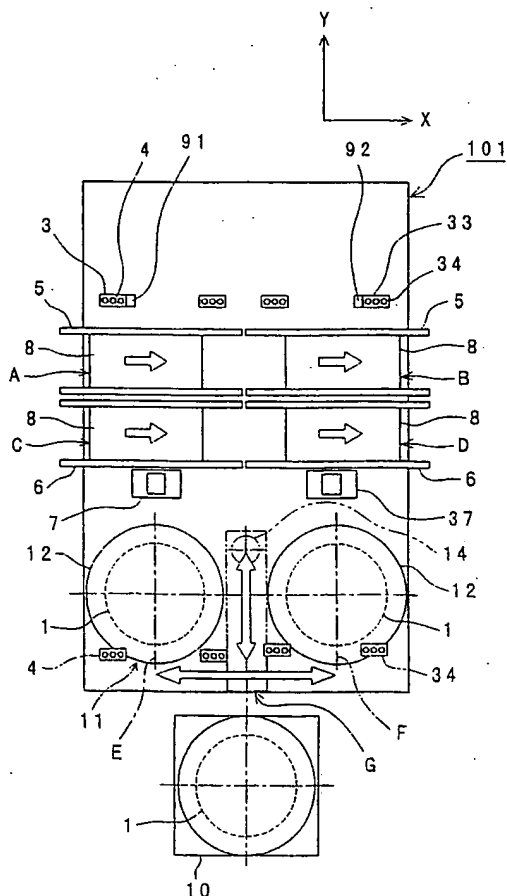

(57) Abstract: A component mounting apparatus (101) is provided with a board holding device (5, 6) for holding a board (8) at a board holding position (A, B, C and D), a first mounting head (4) for holding and taking out a component (2) fed from a first component feeding position (E) and mounting the component on the board held at the board holding position, a second mounting head (34) for holding and taking out the component fed from a second component feeding position (F) and mounting the component on the held board, and a component feeding device (11) having a wafer holding table (12) for holding a wafer (1) on which the respective components are fed so that the wafer holding table can be moved reciprocally between the first component feeding position and the second component feeding position.



WO 2005/022607 A1

European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guide to the Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.